


Stark 304-Grade Toilet Paper Holder with Shelf – Mirror Steel

SKU 12-1018-01-MR · Finish: Mirror Steel

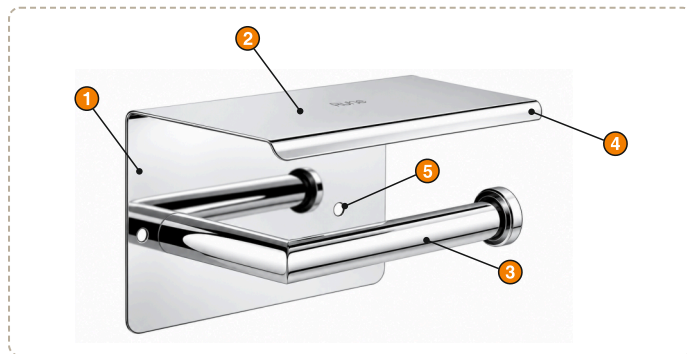

Parts


1. Back plate
2. Shelf (140 x 96 mm)
3. Roll arm (opens on the right)
4. End cap
5. Screw holes (108 mm apart)

Before you start

Check the delivery first. Report any damage within 48 hours of delivery, before fitting, with one continuous, unedited unboxing video: <https://ruheindia.com/pages/warranty-policy#delivery-damage>. Orders from a marketplace follow that marketplace's policy.

- Stark fits brick, concrete and tiled walls. It needs drilling; there is no adhesive option.
- Check for hidden pipes and cables before drilling.
- Wear eye protection when drilling, and keep children away from the work area.
- Prefer us to do it? Book Home Installation on the product page. Ruhe's Home Installation is plumber work only. Terms: <https://ruheindia.com/pages/warranty-policy#home-installation>
- Installation videos: <https://ruheindia.com/pages/installation-repair-videos>


In the box

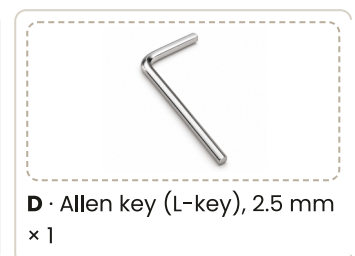

Tools needed

A drill with a tile or masonry bit to suit your wall and the dowels supplied, a pencil, a spirit level and a screwdriver. The Allen key (D) is in the box.


Plan

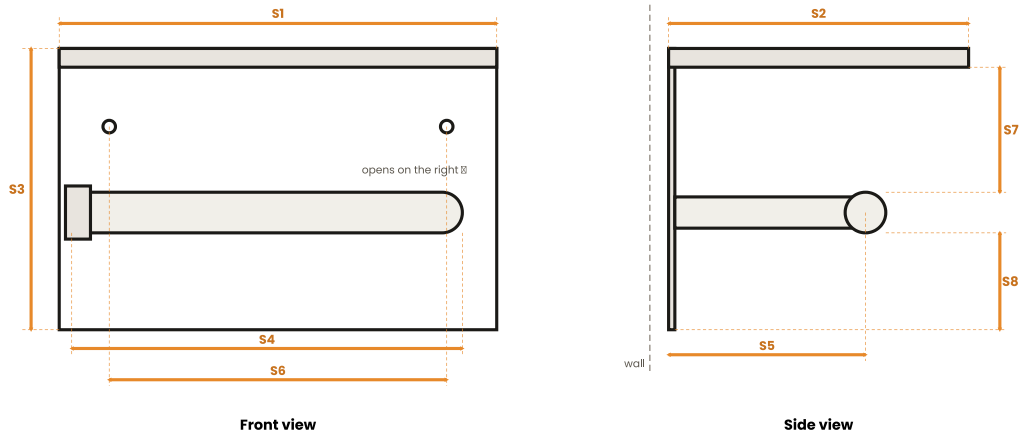


Sizes S1–S8 as in the Technical Sheet: S1 140, S2 96, S3 90, S4 125, S5 63 (all ± 5 mm), S6 108 (screw holes), S7 40, S8 31 mm.

Steps


- Choose the spot**
 About 660 mm (26 in) from the floor to the roll centre and 200 to 300 mm (7.9 to 11.8 in) in front of the front edge of the toilet. Leave free wall space to the right of the holder to slide rolls on. Check for hidden pipes and cables before drilling.

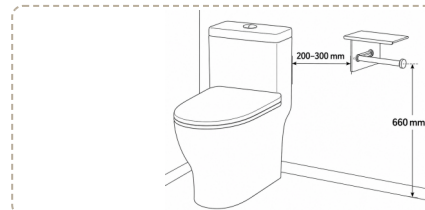


- Mark the holes**
 Hold the back plate against the wall, level it with the spirit level and mark the two screw holes with a pencil (108 mm / 4.3 in apart).

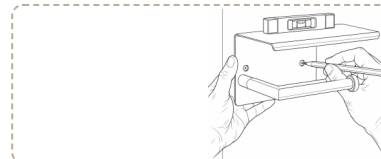


- Drill and fit the dowels**
 Drill the two holes with a bit that suits your wall and the dowels (C). Push the PVC dowels (C) into the holes until they sit flush with the wall.

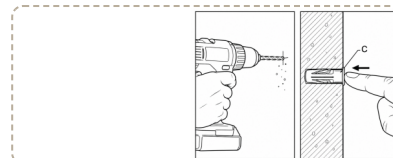


- Screw the back plate**
 Screw the back plate to the wall with the two stainless steel screws (B). Do not over-tighten on tiles.

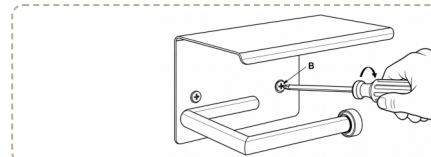

- Fit the roll arm**
 Attach the roll arm to the back plate and tighten it with the Allen key (D).

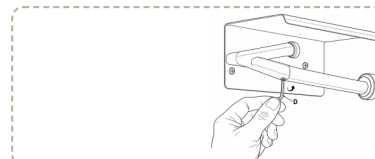

- Load and check**
 Slide a roll onto the arm from the right. Pull the roll gently and check that the back plate and roll arm do not move.

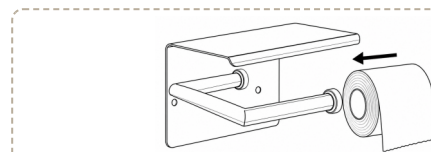

How to use

- To change the roll, slide the empty core off to the right and slide a new roll on from the right.
- Use the shelf for a phone and small, light items. It is not meant for heavy objects.

Troubleshooting

Problem	Likely cause	What to do
The holder moves on the wall	Screws not fully tightened, or dowels not flush with the wall	Check the dowels sit flush and tighten the screws (B). Do not over-tighten on tiles.
The roll arm is loose	Roll arm not tightened	Tighten the roll arm with the Allen key (D).
A new roll does not slide on	No free wall space to the right of the holder	Leave free wall space to the right; refit the holder if needed.

Still not working? Raise a service request: <https://ruheindia.com/pages/service-request-track>

Questions? For questions, WhatsApp or call +91 92059 93317, or email support@ruheindia.com. Talk to a Ruhe expert on video call, Mon–Sat 10 AM–6:30 PM (closed on public holidays). Contact page:

<https://ruheindia.com/pages/contact>

Warranty: 2-year warranty. Free onsite service for the first year, and free replacement parts for the full warranty period. Warranty T&C: <https://ruheindia.com/pages/warranty-policy> · Register your warranty:

<https://ruheindia.com/pages/warranty-registration>

Spare parts: Need a spare part? Ask through our service request form:

<https://ruheindia.com/pages/service-request-track>. Spare parts bought separately carry no warranty.

Designed and manufactured by Ruhe. Ruhe Solutions Pvt. Ltd., 702–703, 7th Floor, Aggarwal Corporate Heights, Netaji Subhash Place, Delhi – 110034. Country of origin: India.